


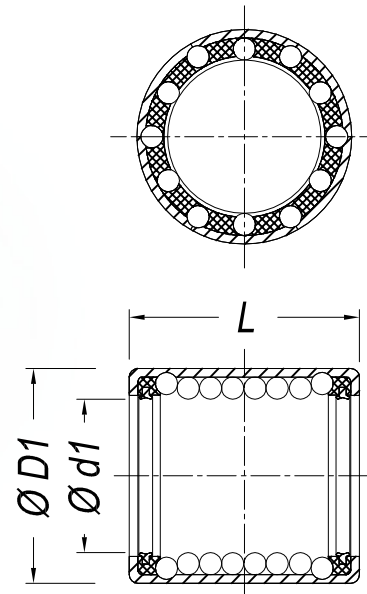

Artikelnr.	Ød	ØD	L	Tragzahlen N		g
				dyn.	stat.	
B-KH-0622	6	12	22	400	239	7
B-KH-0824	8	15	24	435	280	12
B-KH-1026	10	17	26	500	370	14
B-KH-1228	12	19	28	620	510	18
B-KH-1428	14	21	28	620	520	2
B-KH-1630	16	24	30	800	620	27
B-KH-2030	20	28	30	950	790	32
B-KH-2540	25	35	40	1990	1670	66
B-KH-3050	30	40	50	2800	2700	95
B-KH-4060	40	52	60	4400	4450	182
B-KH-5070	50	62	70	5500	6300	252

- Befestigung des Lagers im Gehäuse erfolgt über Sicherungsringe nach DIN 471
- Befestigungsschrauben EN ISO 4762 – 8.8, Federring