





# ZAHNRIEMENRÄDER PROFIL HTD®

## 5M

Teilung 5 mm

für Zahnriemenbreite 15 mm

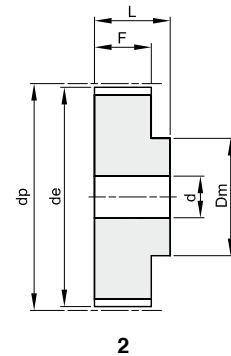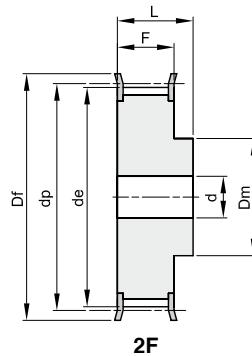

Werkstoff: Stahl  
Werkstoff: Aluminium UNI 9006 – T6 (Al)  
geeignet zum Harteloxieren

| Beschreibung | Artikelnr. | Typ | Werkstoff | Zähnezahl | dp     | de     | Df | Dm   | Di | F    | L  | d | Nr. Bordscheiben | kg   |
|--------------|------------|-----|-----------|-----------|--------|--------|----|------|----|------|----|---|------------------|------|
| 12 5M 15     | 41015012   | 2F  | St        | 12        | 19,10  | 17,96  | 23 | 12,5 |    | 20,5 | 26 | 6 | 202              | 0,03 |
| 14 5M 15     | 41015014   | 2F  | St        | 14        | 22,28  | 21,14  | 25 | 13,5 |    | 20,5 | 26 | 6 | 203              | 0,04 |
| 15 5M 15     | 41015015   | 2F  | St        | 15        | 23,87  | 22,73  | 28 | 16,0 |    | 20,5 | 26 | 6 | 204              | 0,05 |
| 16 5M 15     | 41015016   | 2F  | St        | 16        | 25,46  | 24,32  | 28 | 16,5 |    | 20,5 | 26 | 6 | 204              | 0,06 |
| 18 5M 15     | 41015018   | 2F  | St        | 18        | 28,65  | 27,51  | 32 | 20,0 |    | 20,5 | 26 | 6 | 205              | 0,09 |
| 20 5M 15     | 41015020   | 2F  | St        | 20        | 31,83  | 30,69  | 36 | 23,0 |    | 20,5 | 26 | 6 | 206              | 0,12 |
| 21 5M 15     | 41015021   | 2F  | St        | 21        | 33,42  | 32,28  | 38 | 24,0 |    | 20,5 | 26 | 6 | 207              | 0,14 |
| 22 5M 15     | 41015022   | 2F  | St        | 22        | 35,01  | 33,87  | 38 | 25,5 |    | 20,5 | 26 | 6 | 207              | 0,15 |
| 24 5M 15     | 41015024   | 2F  | St        | 24        | 38,20  | 37,06  | 42 | 27,0 |    | 20,5 | 28 | 6 | 208              | 0,19 |
| 26 5M 15     | 41015026   | 2F  | St        | 26        | 41,38  | 40,24  | 44 | 30,0 |    | 20,5 | 28 | 6 | 209              | 0,23 |
| 28 5M 15     | 41015028   | 2F  | St        | 28        | 44,56  | 43,42  | 48 | 30,5 |    | 20,5 | 28 | 6 | 210              | 0,26 |
| 30 5M 15     | 41015030   | 2F  | St        | 30        | 47,75  | 46,60  | 51 | 35,0 |    | 20,5 | 28 | 6 | 211              | 0,32 |
| 32 5M 15     | 41015032   | 2F  | St        | 32        | 50,93  | 49,79  | 54 | 38,0 |    | 20,5 | 28 | 8 | 212              | 0,35 |
| 36 5M 15     | 41015036   | 2F  | St        | 36        | 57,30  | 56,16  | 60 | 38,0 |    | 20,5 | 28 | 8 | 214              | 0,43 |
| 40 5M 15     | 41015040   | 2F  | St        | 40        | 63,66  | 62,52  | 71 | 38,0 |    | 20,5 | 28 | 8 | 217              | 0,52 |
| 44 5M 15     | 41015044   | 2   | Al        | 44        | 70,03  | 68,89  |    | 38,0 |    | 20,5 | 30 | 8 |                  | 0,23 |
| 48 5M 15     | 41015048   | 2   | Al        | 48        | 76,39  | 75,25  |    | 38,0 |    | 20,5 | 30 | 8 |                  | 0,29 |
| 60 5M 15     | 41015060   | 2   | Al        | 60        | 95,49  | 94,35  |    | 50,0 |    | 20,5 | 30 | 8 |                  | 0,42 |
| 72 5M 15     | 41015072   | 2   | Al        | 72        | 114,59 | 113,45 |    | 50,0 |    | 20,5 | 30 | 8 |                  | 0,59 |